

## 1-1/2" Bullnose Kerf

1-1/2" Bullnose Kerf has a unique shortened back flange allowing for easy insertion into kerfed door jambs and window frames. This provides the smooth, round appearance associated with bullnose trims. Also available in 3/4" radius.

### Product Data and Ordering Information

Material: .0.12 min thickness, minimum G40 galvanized  
Part Number: BK5HDG

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
7'	28	40	196
8'	24	40	192
9'	22	40	198
10'	20	40	200

All Phillips products are made in the U.S.A.

### ASTM and Code Standards

Phillips 1-1/2" Bullnose Kerf meet or exceed the following ASTM standards:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content



MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

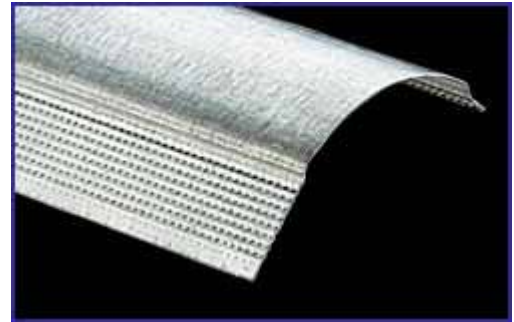

*Drawing not to scale*

### Project Information

Name: none  
Address:

### Contractor Information

Name: 247supply  
Contact: jason  
Phone:  
Fax:

### Architect Information

Name:  
Contact:  
Phone:  
Fax:



## 3/4" Bullnose Kerf

3/4" Bullnose Kerf has a unique shortened back flange allowing for easy insertion into kerfed door jams and window frames. This provides the smooth, round appearance associated with bullnose trims. Also available in 1-1/2" radius.

### Product Data and Ordering Information

Material: .0.12 min thickness, minimum G40 galvanized  
Part Number: BK3HDG

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
7'	58	40	406
8'	50	40	400
9'	45	40	405
10'	40	40	400

All Phillips products are made in the U.S.A.

### ASTM and Code Standards

Phillips 3/4" Bullnose Kerf meet or exceed the following ASTM standards:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content



MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

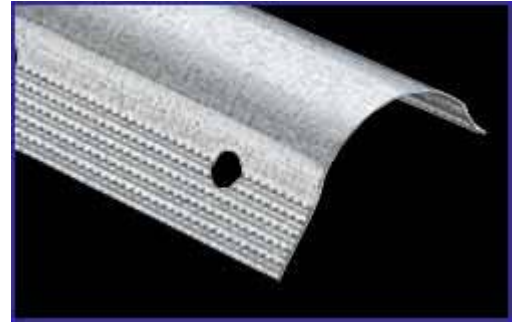

*Drawing not to scale*

### Project Information

Name: none  
Address:

### Contractor Information

Name: 247supply  
Contact: jason  
Phone:  
Fax:

### Architect Information

Name:  
Contact:  
Phone:  
Fax:



## First Choice Splay Bead (Grey Galvanized)

First Choice metal drywall corner beads provide lasting corner protection to exposed drywall edges. This classic drywall finishing product is nailed, stapled, screwed or clinched into place. Flanges are deeply knurled for excellent mud adhesion. Grey galvanized steel surface coating.

### Product Data and Ordering Information

Material: .0.012 min thickness, G30 galvanized  
Dimensions: 1-1/4" leg x 1-1/4" leg  
Part Number: CBSEGB

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
7'	72	48	504
8'	63	48	504
9'	56	48	504
10'	50	48	500
12'	42	48	504

All Phillips products are made in the U.S.A.

### ASTM and Code Standards

Phillips First Choice corner beads meets or exceeds:

- ASTM C 1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content


MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

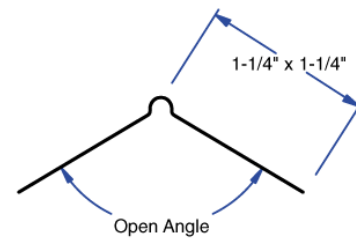

*Drawing not to scale*

#### Project Information

Name: none  
Address:

#### Contractor Information

Name: 247supply  
Contact: jason  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax:



## Everlast® Metal Corner Bead (Hot-Dipped Galvanized)

Everlast® Metal Drywall Corner Beads 3-step hot-dipped galvanized products provide superior corrosion protection. This drywall finishing product is nailed, stapled, screwed or clinched into place. Flanges have deeply knurled mud anchors and etched surfaces for ease of joint compound adhesion and nail attachment.

### Product Data and Ordering Information

Material: .0012 min thickness, minimum G40 galvanized  
Dimensions: 1-1/4" leg x 1-1/4"  
Part Number: CBRHDG

\*Phillips Everlast Economy Square Corner Beads do not meet ASTM C1047 requirement for material thickness.

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
7'	72	48	504
8'	63	48	504
9'	56	48	504
10'	50	48	500
12'	42	48	504

All Phillips products are made in the U.S.A.

### ASTM and Code Standards

All Phillips Everlast® Metal Corner Beads meet or exceed the following ASTM standards:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard\*
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com)

### Leed Credits for Recycled Content



MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

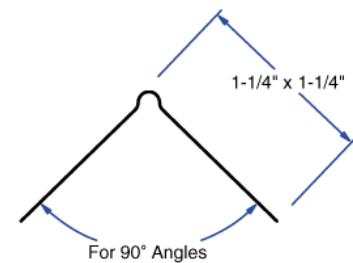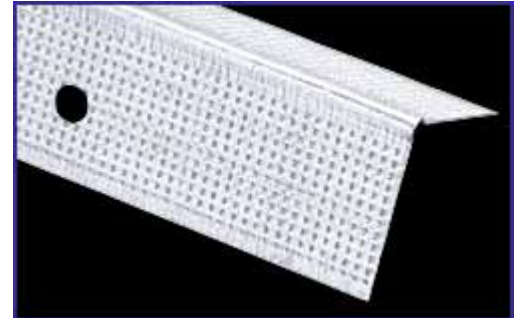

*Drawing not to scale*

### Project Information

Name: none  
Address:

### Contractor Information

Name: 247supply  
Contact: jason  
Phone:  
Fax:

### Architect Information


Name:  
Contact:  
Phone:  
Fax:





## klinchSTIK® Corner Bead

klinchSTIK® metal drywall corner bead provides lasting corner protection to exposed drywall edges. Flanges are deeply knurled and perforated for ease of joint compound adhesion and nail attachment. Grey galvanized steel surface coating provides corrosion protection and sturdy reinforcement at 90° corners. Ideal for installation with a clinching tool.

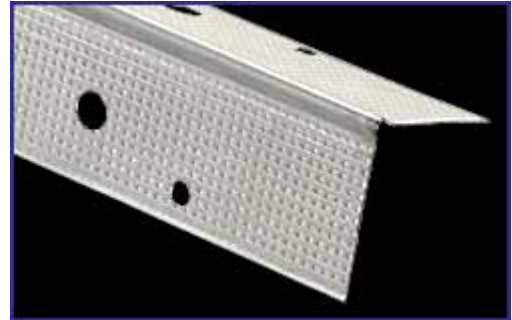


### Product Data and Ordering Information

Material: .0.012 min thickness, G30 galvanized  
Dimensions: 1-1/4" leg x 1-1/4" leg  
Part Number: CBKEGB

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
7'	72	48	504
8'	63	48	504
9'	56	48	504
10'	50	48	500
12'	42	48	504

All Phillips products are made in the U.S.A.



*Drawing not to scale*

### ASTM and Code Standards

Phillips klinchSTIK® corner bead meets or exceeds:

- ASTM C 1047 Standard Specification for Accessories for Gypsum Wallboard.
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

#### Project Information

Name: none  
Address:

#### Contractor Information

Name: 247supply  
Contact: jason  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax:



## 1" L-200 Metal Trim

Metal L-200 trim is a sturdy, steel casing product and mudable trim used to give maximum protection and professionally finished edges to wallboard at window and door jambs and when applied where wallboard abuts different surfaces such as suspended ceilings, plaster, beams, masonry and concrete. No back flange for easy installation.



### Product Data and Ordering Information

Material: .0.012 min thickness, G30 galvanized  
Dimensions: 1" leg x Width x 1" leg  
Part Numbers: LT1

Available in hot-dipped galvanized (HDG) and grey galvanized (EGB) surface coatings.

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
8'	63	48	504
10'	50	49	500

All Phillips products are made in the U.S.A.

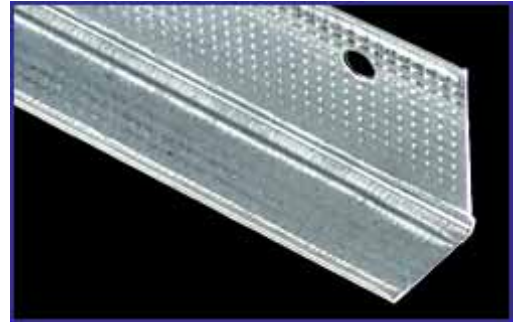

*Drawing not to scale*

### ASTM and Code Standards

Phillips L-200 trims meets or exceeds:

- ASTM C 1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

#### Project Information

Name: none  
Address:

#### Contractor Information

Name: 247supply  
Contact: jason  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax:



## 1/2" L-200 Metal Trim

Metal L-200 trim is a sturdy, steel casing product and mudable trim used to give maximum protection and professionally finished edges to wallboard at window and door jambs and when applied where wallboard abuts different surfaces such as suspended ceilings, plaster, beams, masonry and concrete. No back flange for easy installation.



### Product Data and Ordering Information

Material: .012 min thickness, G30 galvanized  
Dimensions: 1" leg x Width x 1" leg  
Part Numbers: LT5

Available in hot-dipped galvanized (HDG) and grey galvanized (EGB) surface coatings.

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
8'	63	48	504
10'	50	49	500

All Phillips products are made in the U.S.A.

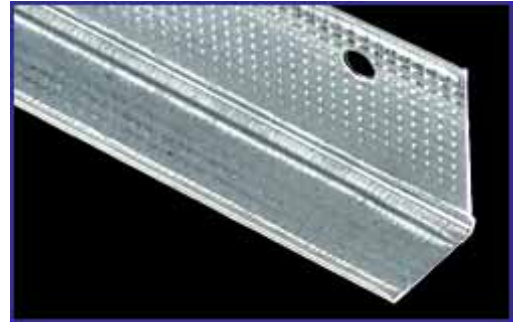

*Drawing not to scale*

### ASTM and Code Standards

Phillips L-200 trims meets or exceeds:

- ASTM C 1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

#### Project Information

Name: none  
Address:

#### Contractor Information

Name: 247supply  
Contact: jason  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax:

## 1/4" L-200 Metal Trim

Metal L-200 trim is a sturdy, steel casing product and mudable trim used to give maximum protection and professionally finished edges to wallboard at window and door jambs and when applied where wallboard abuts different surfaces such as suspended ceilings, plaster, beams, masonry and concrete. No back flange for easy installation.

### Product Data and Ordering Information

Material: .0.012 min thickness, G30 galvanized  
Dimensions: 1" leg x Width x 1" leg  
Part Numbers: LT2

Available in hot-dipped galvanized (HDG) and grey galvanized (EGB) surface coatings.

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
8'	63	48	504
10'	50	49	500

All Phillips products are made in the U.S.A.

### ASTM and Code Standards

Phillips L-200 trims meets or exceeds:

- ASTM C 1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content



MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

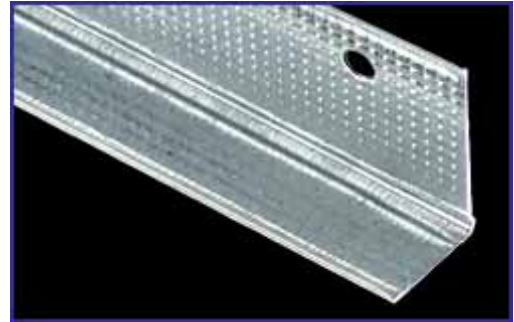

*Drawing not to scale*

### Project Information

Name: none  
Address:

### Contractor Information

Name: 247supply  
Contact: jason  
Phone:  
Fax:

### Architect Information

Name:  
Contact:  
Phone:  
Fax:



## 3/4" L-200 Metal Trim

Metal L-200 trim is a sturdy, steel casing product and mudable trim used to give maximum protection and professionally finished edges to wallboard at window and door jambs and when applied where wallboard abuts different surfaces such as suspended ceilings, plaster, beams, masonry and concrete. No back flange for easy installation.



### Product Data and Ordering Information

Material: .0.012 min thickness, G30 galvanized  
Dimensions: 1" leg x Width x 1" leg  
Part Numbers: LT7

Available in hot-dipped galvanized (HDG) and grey galvanized (EGB) surface coatings.

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
8'	63	48	504
10'	50	49	500

All Phillips products are made in the U.S.A.

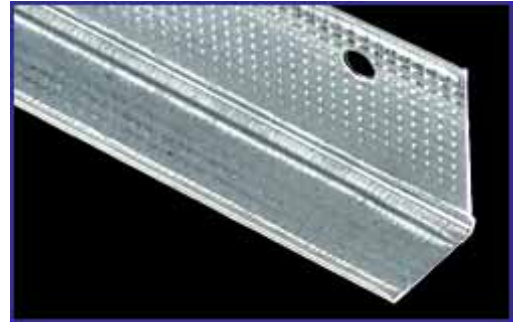

Drawing not to scale

### ASTM and Code Standards

Phillips L-200 trims meets or exceeds:

- ASTM C 1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

#### Project Information

Name: none  
Address:

#### Contractor Information

Name: 247supply  
Contact: jason  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax:

## 5/8" L-200 Metal Trim

Metal L-200 trim is a sturdy, steel casing product and mudable trim used to give maximum protection and professionally finished edges to wallboard at window and door jambs and when applied where wallboard abuts different surfaces such as suspended ceilings, plaster, beams, masonry and concrete. No back flange for easy installation.



### Product Data and Ordering Information

Material: .0.012 min thickness, G30 galvanized  
Dimensions: 1" leg x Width x 1" leg  
Part Numbers: LT6

Available in hot-dipped galvanized (HDG) and grey galvanized (EGB) surface coatings.

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
8'	63	48	504
10'	50	49	500

All Phillips products are made in the U.S.A.

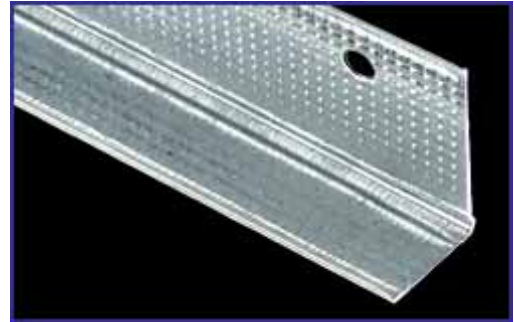

*Drawing not to scale*

### ASTM and Code Standards

Phillips L-200 trims meets or exceeds:

- ASTM C 1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

#### Project Information

Name: none  
Address:

#### Contractor Information


Name: 247supply  
Contact: jason  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax:

## Everlast® 1-1/2" Metal Bullnose Splay Corner Beads (Hot-Dipped Galvanized)

Everlast® Metal Drywall Corner Beads 3-step hot-dipped galvanized products provide superior corrosion protection. Bullnose profiles are available in both 3/4" and 1-1/2" radius. Flanges have deeply knurled mud anchors and etched surfaces for ease of joint compound adhesion and nail attachment. This drywall finishing product is nailed, stapled, screwed or clinched into place.

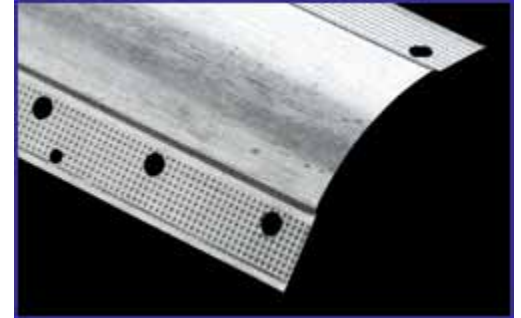


### Product Data and Ordering Information

Material: .0.012 min thickness, minimum G40 galvanized  
Dimensions: 1-1/2" radius  
Part Number: BS5HDG

\*Phillips Everlast Economy Square Corner Beads do not meet ASTM C1047 requirement for material thickness.

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
10"	20	40	200

All Phillips products are made in the U.S.A.

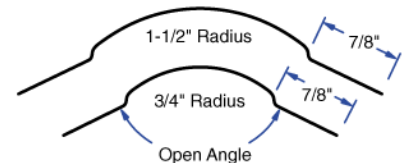

*Drawing not to scale*

### ASTM and Code Standards

All Phillips Everlast® Metal Corner Beads meet or exceed the following ASTM standards:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

#### Project Information

Name: none  
Address:

#### Contractor Information

Name: 247supply  
Contact: jason  
Phone:  
Fax:


#### Architect Information

Name:  
Contact:  
Phone:  
Fax:



## Everlast® 3/4" Metal Bullnose Splay Corner Beads (Hot-Dipped Galvanized)

Everlast® Metal Drywall Corner Beads 3-step hot-dipped galvanized products provide superior corrosion protection. Bullnose profiles are available in both 3/4" and 1-1/2" radius. Flanges have deeply knurled mud anchors and etched surfaces for ease of joint compound adhesion and nail attachment. This drywall finishing product is nailed, stapled, screwed or clinched into place.

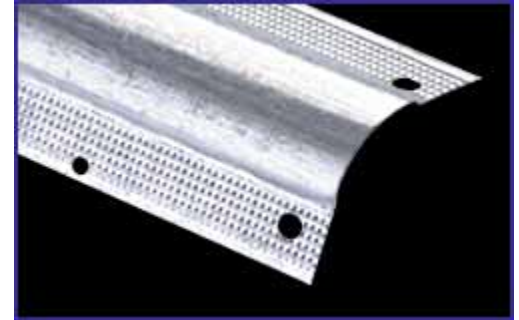


### Product Data and Ordering Information

Material: .0.012 min thickness, minimum G40 galvanized  
Dimensions: 3/4"  
Part Number: BS3HDG

\*Phillips Everlast Economy Square Corner Beads do not meet ASTM C1047 requirement for material thickness.

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
7'	72	48	504
8'	63	48	504
9'	56	48	504
10'	50	48	500
12'	42	48	504

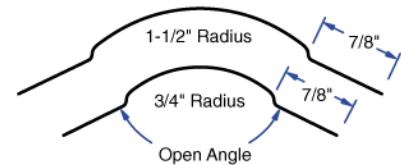

*Drawing not to scale*

All Phillips products are made in the U.S.A.

### ASTM and Code Standards

All Phillips Everlast® Metal Corner Beads meet or exceed the following ASTM standards:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

#### Project Information

Name: none  
Address:

#### Contractor Information

Name: 247supply  
Contact: jason  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax:

